

► **Code Number:**

0334043

► **Description**

The Sloan WB-1-A Easy Access Wall Box allows for the installation of a Concealed Flushometer where behind the wall access is not provided. Ideal for vandal prone installations, the WB-1-A Easy Access Wall Box is engineered to withstand years of high volume use. The WB-1-A Easy Access Wall Box has a brushed Stainless Steel Wall Panel that enhances the appearance of the Flushometer installation.

The WB-1-A Easy Access Wall Box is designed to install in a 12" x 12" wall opening. The WB-1-A Wall Box can be used with both mechanical push button or hydraulically operated Sloan Flushometer valves.

► **Specifications**

The Wall Box Assembly has the following features:

- 13½" (343 mm) x 13½" (343 mm) #304 Brushed Stainless Steel Wall Panel (16 gauge)
- Steel Frame for a 12" (305 mm) x 12" (305 mm) wall opening
- Four (4) Spanner Security Screws with Spanner Bit
- Grouting Pins to anchor Frame to wall

The WB-1-A Easy Access Wall Box can be used with Sloan Royal®, Regal®, Naval® and Hydraulic Concealed Flushometers.


WALL BOX AND FLUSHOMETER MUST BE SPECIFIED AND ORDERED SEPARATELY.

When ordering a Sloan Flushometer (except Hydraulic) for use with the WB-1-A Easy Access Wall Box, specify the "WB" Variation (i.e., Model 152-WB). This will ensure that the Flushometer is supplied with the special Push Button/Handle assembly that is required for use in a wall box installation.

When ordering a Sloan Hydraulic Flushometer for use with the WB-1-A Easy Access Wall Box, specify the HY-33-A Fixture Wall (FW) or HY-108-A Metal Button Panel Mount (MBPM) Push Button Actuator. See the HYDRAULIC FLUSHOMETERS Section of the Sloan catalog for details on these Actuators.

► **Variations**

Less Center Hole

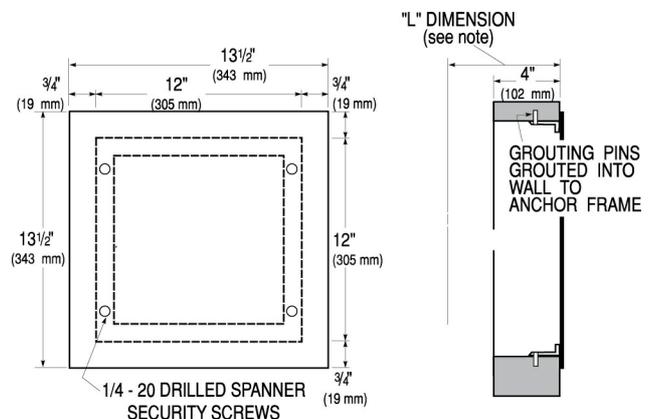

NOTE: "L" Dimension is the Wall Thickness (to the nearest whole inch) plus 2¾". Specify "L" Dimension when ordering Flushometer.

This space for Architect/Engineer Approval