




ECOS



G2 OPTIMA plus



Sloan OPTIMA plus

Maintenance Guide

ECOS, G2 and Sloan OPTIMA PLUS TROUBLESHOOTING FLOW CHART

ITEMS TO HAVE ON HAND:

- New AA Alkaline Batteries
- New Solenoid (EBV-136-A)
- New Module
 - Closet (EBV-196-A) ECOS
 - Closet (EBV-129-AC) G2, Sloan Optima Plus
 - Urinal (EBV-129-AU) G2, Sloan Optima Plus
- New Button
 - ECOS (WES-23-A)
 - G2, Sloan Optima Plus (EBV-130-A)
- New Diaphragm
 - Closet (EBV-1020-A)
 - Urinal (EBV-1022-A)
- Flat Screwdriver
- 7/64" Hex Wrench

UNIT DOES NOT FLUSH AT ALL

Press Silver button.
Did you hear 2 clicks,
2 seconds apart?

YES

Check if water is on.
Inspect, clean or replace
diaphragm kit.
Make sure inner cover is free
of debris.

NO

Stand in front of the unit.
Press and hold the Silver button for at
least 40 seconds. Release button.

Do you see a flashing
light while standing in front of
the unit?

NO

Remove cover.
Did the light start to flash?

NO

Replace batteries.
Light should now flash. If not,
replace module.

YES

Batteries are good.
Remove Cover. Disconnect installed solenoid from
the back of the module.
Plug a new solenoid into the module (leave solenoid
on top of module). Step away from the unit.

YES

Replace button assembly.

Did the new
solenoid click twice, 2
seconds apart?

NO

Replace module.
Remove Magnet.
Connect existing solenoid.
Replace cover. Press button
to activate flush.

YES

Turn off water at the stop. Remove module. Unscrew
solenoid from the inner cover. Make sure both large and small
O-rings have been removed from the solenoid mounting hole.
Remove black cap from the new solenoid. Ensure that both large
and small O-rings are in place. Screw new solenoid into the inner
cover "hand tight." Install solenoid connector into the back of the
module. Reinstall cover. Press button to activate new solenoid.
Turn water back on. Press button to flush bowl. If unit continues
to flush, go to page 2.

UNIT IS CONTINUOUSLY FLUSHING

Turn water off at the stop.
Press Silver button.
Did you hear 2 clicks, 2 seconds apart?

YES

Clean or replace diaphragm kit. Make sure inner cover is free of debris.
(If the solenoid has been serviced, hand tighten the solenoid, check for missing or double O-rings on the top of the solenoid.)

NO

Stand in front of the unit.
Press and hold the Silver button for at least 40 seconds.
Release button.

Do you see a flashing light while standing in front of the unit?

NO

Replace batteries (alkaline only).
Ensure batteries are oriented correctly.
Light should now flash, if not replace module.

YES

Batteries are good.
Remove Cover.
Disconnect installed solenoid from the back of the module.
Plug a new solenoid into the module (leave solenoid on top of module).
Step away from the unit.

Remove the module.
Unscrew solenoid from the inner cover. Make sure both large and small O-rings have been removed from the solenoid mounting hole. Remove black cap from the new solenoid. Ensure that both large and small O-rings are in place. Screw new solenoid into the inner cover "hand tight." Install solenoid connector into the back of the module. Reinstall cover. Press button to activate new solenoid. Turn water back on. Press button to flush bowl.

If unit does not flush, check for multiple O-rings.


If unit still continues to flush, repeat this procedure.

Did the new solenoid click twice, 2 seconds apart?

YES

NO

Replace module.
Remove Magnet.
Replace cover.
Press button to activate flush.

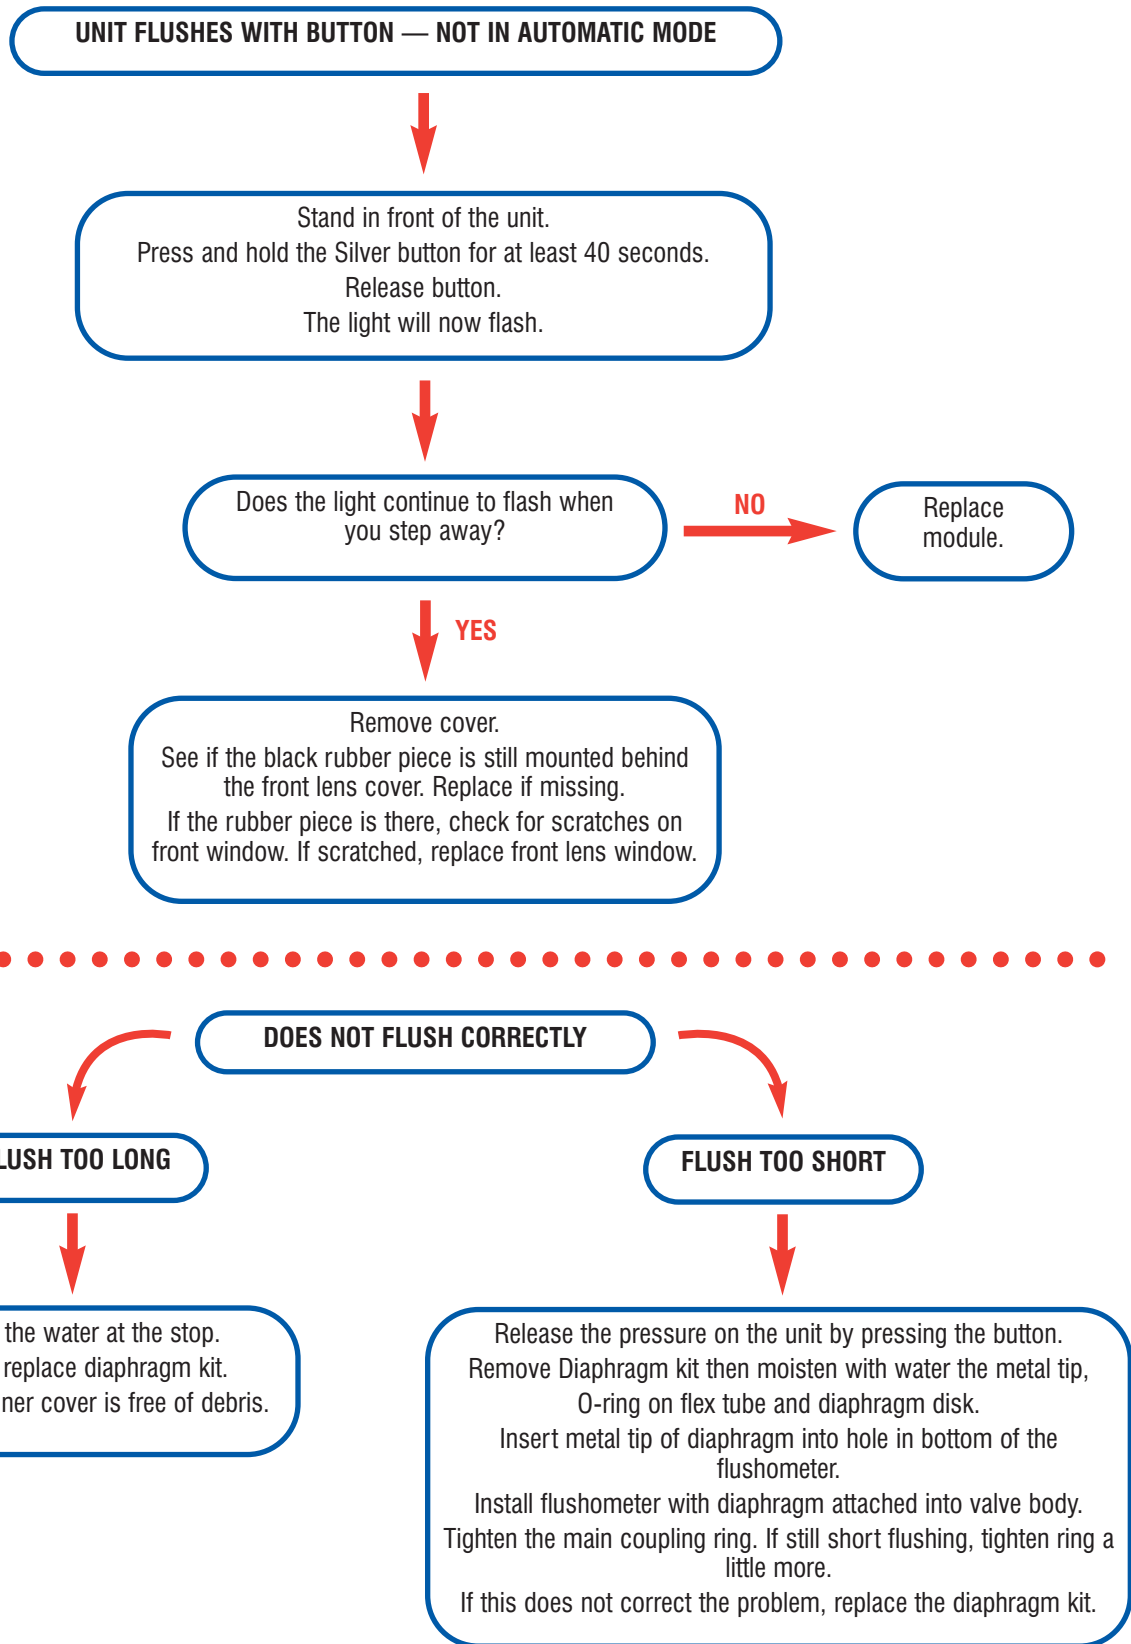

The information contained in this document is subject to change without notice.

SLOAN VALVE COMPANY • 10500 SEYMOUR AVENUE • FRANKLIN PARK, IL 60131

Phone: 1-800-9-VALVE-9 or 1-847-671-4300 • Fax: 1-800-447-8329 or 1-847-671-4380 • www.sloanvalve.com